


WINDSPILL JR FIXED BANNER MOUNTING HARDWARE INSTALLATION INSTRUCTIONS

To properly mount your banner top and bottom using Windspill JR Fixed Hardware, you will need two #5527F Arm Units and 4 ea. #5552 Windspill Quick-Release Banding per banner.

1. Determine how high you want the bottom of the banner to be from the ground (we recommend 14' when on the street side of the pole, so trucks won't hit the lower arm). Add the length of the banner to find where you should mount the TOP bracket.
2. Mount the TOP Bracket to the pole with two of the banding straps (duct tape holds the unit in place while you strap it). *Make certain that the "Banner Tie-Down Support Wings" on the casting are facing down toward the banner.* Each strap wraps over the guide at the top and bottom of the arm unit. (There is a third strap guide for additional strength for large banners). Tighten each strap securely with the fiberglass rod pointing towards and perpendicular to the street (assuming you want the banner to hang over the street side of the pole).
3. Slide the top hem of the banner over the rod and bring the inside edge of the banner to the inside end of the rod. If you have a grommet in the hem, that is the side that should go on first and attach to the banner hold-down holes in the casting support wings with an electricians' plastic zip-tie or a length of wire. Just attach it loosely, as its main function is to keep the banner from moving off the rod.
4. Next, slide the bottom arm unit rod into the bottom hem of the banner.
5. Place the bottom arm unit on the pole directly below the top arm unit. *Make certain that the "banner tie-down support wings" on the casting are facing up toward the banner.* Wrap the banding around the pole and over the top banding guide of the arm unit. Just tighten the banding snugly while leaving the inside edge of the banner with a little play.
6. The second (and third, if desired) banding strap should now be installed around the pole and over the bottom banding guides. Tighten the band, drawing the bottom of the arm unit snugly to the pole. The banner should be evenly taught across its surface without any wrinkles or stretch marks. Once you have adjusted the bottom bracket up or down to achieve the desired look, then, tighten both pieces of strapping securely.
7. Install the bottom tie-down through the grommet in the banner.

NOTE: if you are installing two banners per pole, you will need 4 #5527F Arm Units and 6 ea. #5552 Windspill Quick-Release Banding pieces. Proceed as above, except place an arm unit on the opposite side of the pole top and bottom using the same banding for both.

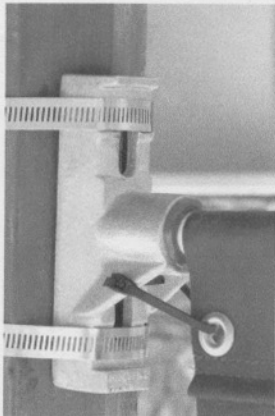

House of Flags Inc.
7325 - 101 Avenue
Edmonton, AB T6A 0H9
Ph. (780) 450-4173 Fx. (780) 450-2724